




Specialists in Sludge Drying

BELT DRYERS



- Evaporation rates from 200kg to 3,000 kg / h
- Low temperature drying for safe operation
- Full or partial drying in one step
- Flexible heating with direct or indirect options
- High quality granulated final product
- Uncomplicated operation with rapid start up and shut down
- Variably adjustable retention time
- Gentle drying with minimal product attrition
- Mobile or fixed units

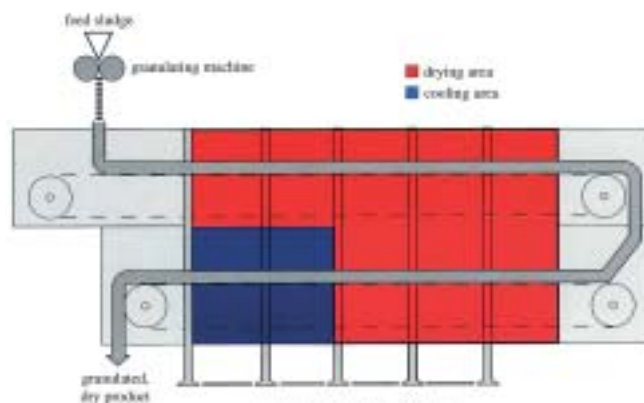

The belt dryer was developed to dry various sludges in a simple, energy efficient and dust free way to d.s contents of 65% to 95%. The mechanically dewatered sludge is extruded on to the perforated belt where it is conveyed slowly through the drying zone and discharged at the end of the conveyor. The retention time can be adjusted very accurately such that homogeneous drying is achieved.

Euroby Drying Technology Ltd

Columbia House, Columbia Drive, Worthing, West Sussex BN13 3HD

T - 01903 69 44 00 F - 01903 69 44 77 E - sales@euroby.com www.euroby.com